




# Adheez

Sheathing Adhesive

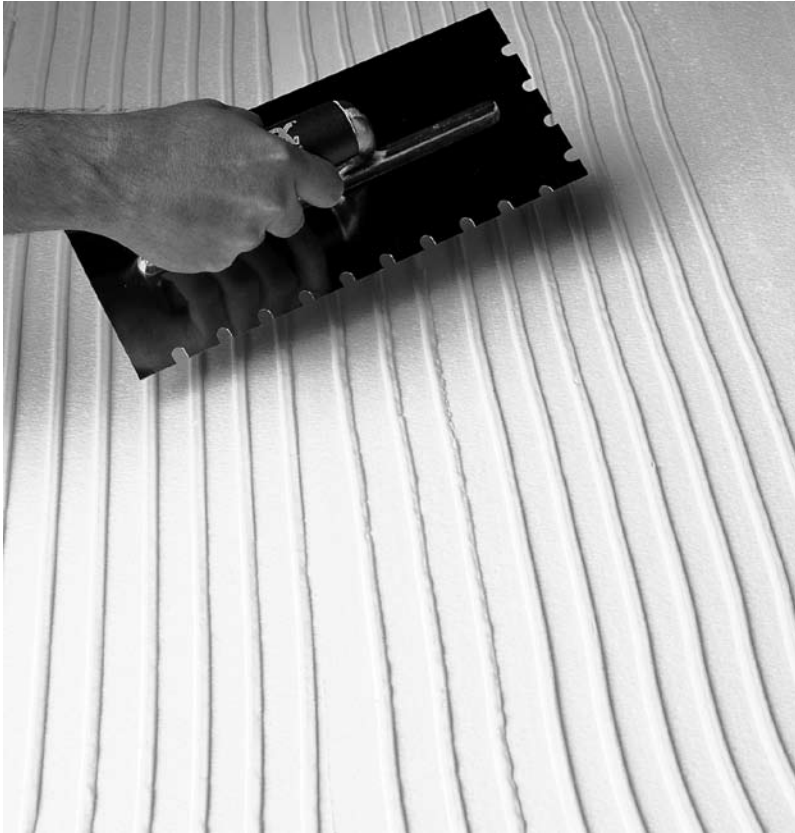

**DESCRIPTION:**

- Adhesive to laminate EPS to listed substrates
- 100 percent acrylic polymer base
- Ready to use, applied without the addition of cement
- Exceptional workability

**USES:**

EPS adhesive for the following substrates:

- Wood
- Gypsum Sheathing
- Glass Mat Sheathing
- Metal Siding and painted surfaces in combination with mechanical fasteners



# Adheez

Sheathing adhesive

## COVERAGE:

Depending on the condition of substrate and the method of application, approximate coverages are:

- 250 sq. ft., (23.23m<sup>2</sup>) per pail

## CONTAINER:

60 lbs. (27.22 kg) net weight in plastic pails.

- Storage: Protect from sun and freezing at all times  
-Do not stack pails more than 3 pails high
- Shelf Life: One year if protected from sun and freezing

## WORKING TIME:

Set time depends upon temperature and humidity. High humidity and low temperatures extend working time.

## DRYING TIME:

Full adhesive bond strength is reached after 1-2 days, depending upon humidity and temperature.

## CLEANUP:

Water-soluble prior to drying. Clean tools and containers with water prior to drying.

## SURFACE PREPARATION:

- Planar irregularities are limited to 1/4 in. (6mm) or less in a 4 ft. (1,219 mm) radius. Surface irregularities are limited to 1/4 in. (6mm) or less.
- Remove surface contaminants such as dust or dirt without damaging the substrate.

- Painted substrates must have paint removed with methods that result in no more than 10 percent of the remaining surface having paint.
- For additional options for surface preparation, contact ParexLahabra Technical Services Department.

## MIXING:

- Use clean equipment for mixing and preparation.
- Teifs Adheez is a factory pre-mixed product.
- Up to 16 oz. (0.47 L) of cool potable water may be added to Adheez to improve workability.
- No additives of any kind such as rapid binders, antifreeze, accelerators, fillers, portland cement, etc., should be added under any circumstances.
- Keep container closed when not in use.

## APPLICATION:

- Read the entire label before using this product.
- Apply with a notched trowel to the back of the insulation board. Notched trowel size and application depends on the wall system specified. Check the applicable specifications for details.
- Immediately place the insulation board firmly onto the clean, dry substrate or dry Teifs WeatherSeal
- Apply the insulation board to the wall with firm pressure to the entire surface. Do not tamp the face of the insulation board.

- Use a sliding motion in a horizontal bond pattern and install the board from the bottom to the top of the wall (with Teifs Weathertight VNT, the board should not be slid into place).
- Insulation board joints should not align with the sheathing joints
- Make sure there are no gaps or Adheez between insulation boards. All edges should but tightly.
- Periodically, check adhesion by removing a board. If Adheez has been properly installed, Adheez will be on both the substrate and the insulation board. Reinstall after checking.
- Temporary fasteners may be used while installing insulation board, but should be removed very carefully to avoid damage to the insulation board.

## LIMITATIONS:

- Ambient and surface temperatures must be 40 °F (4°C) or higher during application and drying time. Provide supplemental heat and protection from precipitation as needed.
- Use only on surfaces that are sound, clean, dry, unpainted (except in combination with mechanical fasteners), and free from any residue that might affect the ability of Teifs Adheez to bond to the surface.
- Avoid application in direct sunlight in hot weather.



## Corporate Office

ParexLahabra, Inc.  
4125 E. La Palma Avenue,  
Suite 250  
Anaheim, CA 92807  
(714) 778-2266  
(866) 516-0061

## Sales Office

Teifs  
220 Burluson  
San Antonio, TX 78202  
(800) 358-4785

## Plants

French Camp, CA  
San Antonio, TX

