





Teifs Prime Teifs Sanded Primer

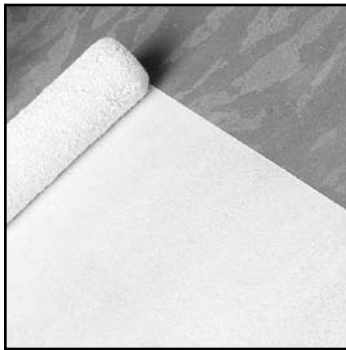

Prime



Sanded Primer

DESCRIPTION:

- 100 percent acrylic-based primer (Teifs Prime) and sanded primer (Teifs Sanded Primer).
- Improves the mechanical bond of the finish
- Reduces the chance of efflorescence which may result from the cement content of various bases
- Enhances the appearance and uniformity of the finish
- Improves water resistance of Teifs EIF Systems
- Water-vapor permeable. Does not create a vapor retarder
- Improves finish coverage.

USES:

Interior and exterior:

- Required for:
 - Application of Earthstone, Tuffstone, and Tuffstone Granite (Teifs Sanded Primer only)
 - Interior drywall
- Optional for:
 - Cementitious Base Coats: for Swirl Textures Finishes
 - Full Synthetic Base Coat: for dark color finishes
 - Any surface suitable for Teifs finishes.
 - Portland cement-based stucco.

COMPOSITION:

- Binder Base: 100 percent acrylic
- Water base: VOC compliant
- Pigment base: Titanium dioxide
- Color: White or tinted to the color of Teifs finish



Teifs Prime Teifs Sanded Primer

COVERAGE:

Depending on the condition of the substrate and method of application, approximate coverages are:

- Teifs Prime:
One coat: 1600-2000 sq. ft.
(150-185 sq. m) /pail
- Teifs Sanded Primer:
One coat: 600-800 sq. ft.
(65-74 sq. m) /pail

CONTAINER:

60 lb (27.7 kg) net weight in plastic pails.

- Storage: Protect from sun and freezing at all times
-Do not stack more than 3 pails high
- Shelf Life: One year if protected from sun and freezing

DRYING TIME:

Approximately 1/2 to 4 hours depending upon temperature, humidity and substrate.

CLEANUP:

Water soluble prior to drying. Clean tools and containers with water prior to drying.

SURFACE PREPARATION:

- Remove surface contaminants such as dust or dirt without damaging the substrate.
- For previously painted surfaces, all loose and chalking paint must be removed, and glossy surfaces dulled.
- New concrete and masonry must be clean and cured a minimum of 28 days.
- Check concrete surfaces for alkalinity and treat. Any form-release agents or bond breakers must be removed.
- Uneven concrete or masonry can be leveled with Teifs Base or Base DB Base Coat & Adhesive or other suitable, compatible product.
- For interior drywall, prepare as for painting.
- For additional options contact ParexLahabra Technical Services Department.

MIXING:

Teifs Prime:

- Mix thoroughly. Up to 2 gallons (7.5L) of clean cool potable water can be added.

Teifs Sanded Primer:

- Mix thoroughly. Up to 1 gallon (3.8L) of clean water can be added.

APPLICATION:

- Read the entire label before using this product.
- Apply with a roller, brush or suitable spray equipment in a continuous coat.
- Teifs Prime and Teifs Sanded Primer must be completely dry before any Teifs finish coating is applied.
- When using Teifs Swirl Texture finishes, the primer should be tinted to the color of the finish coating.
- Keep container closed when not in use.
- When using with Earthstone, Tuffstone or Tuffstone Granite use Teifs Sanded Primer that has been tinted to match the Earthstone, Tuffstone, and Tuffstone Granite aggregate average.

LIMITATIONS:

- Ambient and surface temperatures must be 40 °F (4 °C) or higher during application and drying time. Provide supplemental heat and protection from precipitation as needed.
- Use only on surfaces that are sound, clean, dry, unpainted and free from any residue which may affect the ability of either Teifs Prime or Teifs Sanded Primer to bond to the surface.
- Application in direct sunlight in hot weather may adversely affect aesthetics.



Corporate Office
ParexLahabra, Inc.
4125 E. La Palma Avenue, Suite 250
Anaheim, CA 92807
(714) 778-2266
(866) 516-0061

Sales Office
Teifs
220 Burluson
San Antonio, TX 78202
(800) 358-4785

Plants
French Camp, CA
San Antonio, TX

